


Rock, perch, sit or lean.

And all positions in-between. [RockerOtt 10.™](#)

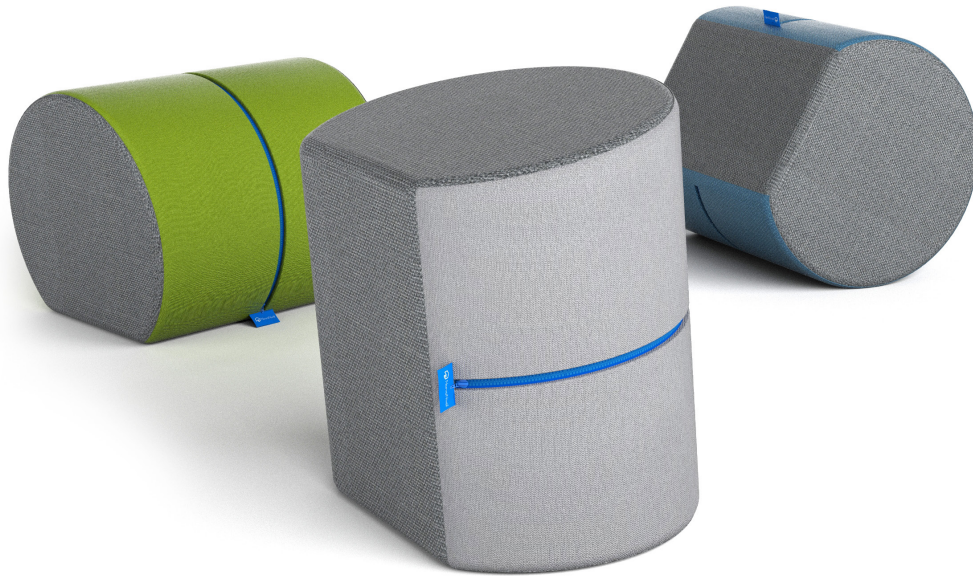

Our company is grounded in the belief that the choice is theirs. It all started 10 years ago when product designer Avron Levin stumbled upon a problem facing the modern classroom –Learner needs. Restrictive, static and one-size-fits-all, traditional seating didn't offer the motion, mobility, and comfort required for learner engagement. And education itself was changing; influenced by the growing intentional design movement, educators were now demanding products and spaces that would facilitate a future-ready pedagogy. And so was born the first generation of the RockerOtt. A decade later, NorvaNivel is a leader in innovative learning spaces, and the RockerOtt is an educational favorite around the world.

The RockerOtt 10 offers a new ergonomic slant on our favorite rock star, and is just one example of our commitment to relentlessly explore new ways to design learner-centered spaces where not one, but every child is engaged, and every educator empowered.

See back for more info and reasons to spec NorvaNivel RockerOtt 10™

NorvaNivel®
Give them space.

Specifications:

RockerOtt 10™

Key Product Features

- 10° angle to ergonomically supports the lower back
- Facilitates active sitting, known to improve cognitive development and well-being
- Learners flip to choose from three seat choices and two heights
- Unique foam core supports learners through all their natural body movements

Key Dimensions

12" High	16" High	18" High
Length: 16"	Length: 16"	Length: 16"
Width: 18"	Width: 18"	Width: 18"


Product Characteristics and Performance:

External:

- Standard high commercial grade fabric and vinyl available from Spradling and Momentum Textiles
- Further details provided on specification

Foam Properties:

- Color: Grey
- Density: 1.70-1.90 lbs./cu. Ft. (ASTM D-3574-17)
- Indentation Force Deflection: 81.0-99.0 lbs. / 50 sq. In. (25% deflection) (ASTM D-3574-17)
- Tensile Strength: >10.0 lbs./sq. In. (ASTM D-3574-17)
- Elongation: >100% (ASTM D-3574-17)
- Tear Resistance: >1.0 lbs./lin. In. (ASTM D-3574-17)
- Compression Set: <10.0% (50% compression) (ASTM D-3574-17)
- Flammability: Pass (CA TB117-2013)
- CertiPUR-US Certified
- Free of flame retardant
- Free of mercury, lead, and heavy metals
- Free of formaldehyde
- Free of prohibited phthalates
- Low VOCs

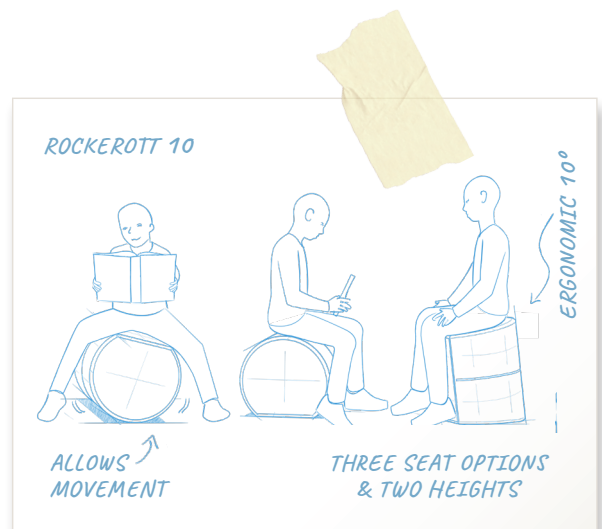

Warranty

- Warranty of product covers a 10 year period
- Fabric and vinyl warranties to be passed on by the manufacturer of materials
- Warranty is a structural warranty over the correct use of the product
- Refer to NorvaNivel standard warranty document for details

Assembly

Item comes fully assembled

Packaging

Items packaged in box or wrapped

Age Group

K-12 and Higher Ed

Learn more about NorvaNivel's innovative range.
Contact your dealer today.

